



**Weight** 50kg/m<sup>2</sup>      **Module Width** 300 - 1800mm  
**Standard Module Height** 600mm minimum,  
 (increasing increments of 203mm)  
 Intermediate heights are available

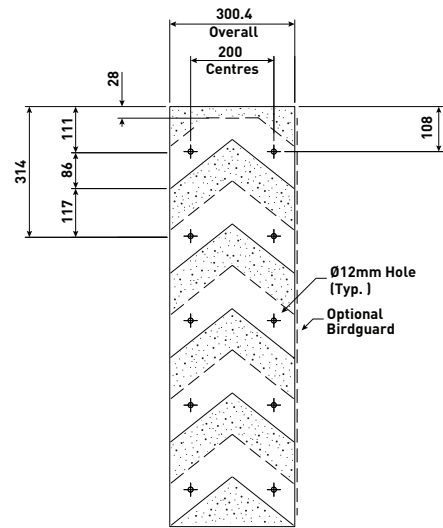


**Acoustic Performance**

Octave Band Centre Frequency (Hz)	63	125	250	500	1k	2k	4k	8k
Transmission Loss (dB)	-	5	10	12	17	22	21	21
Acoustic Rating	<b>R<sub>w</sub>18dB / D<sub>new</sub>26dB</b>							
<b>For noise reduction, add 6dB to the above values</b>								

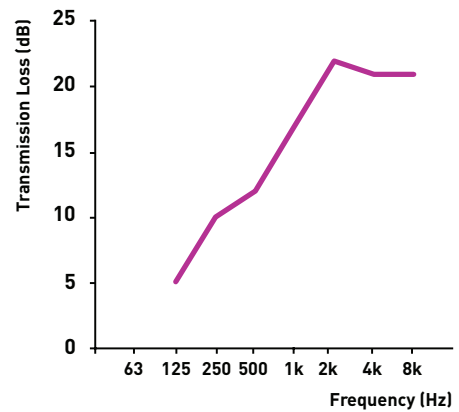

**Aerodynamic Performance**

Static Pressure Drop (N/m <sup>2</sup> )	10	20	30	40	50	60	70	80	90	100
Face Velocity (m/s)	-	1.95	2.39	2.76	3.09	3.39	3.66	3.91	4.15	-
Nominal Free Area	42%*      * Average over louvre depth									
Aerodynamic Coefficient	<b>(k) 8.7</b>									
Discharge Coefficient	<b>0.34</b>									

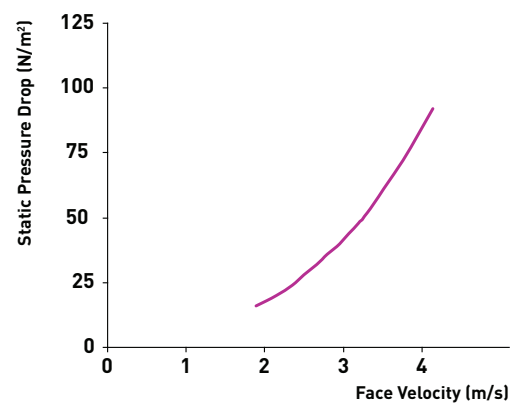

Errors and Omissions Excepted (E&OE).